


PRINT PREVIEW NICKNACK

date:

logo size: 40×30 mm

colour specification:

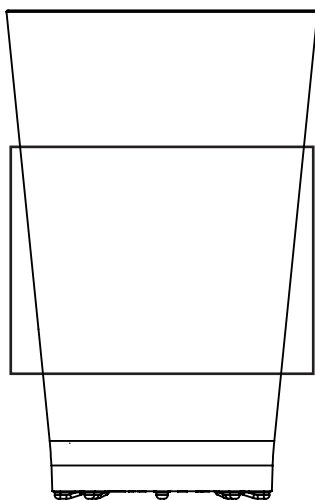

0,04 l

1:1

Minimal thickness of lines and negative space between lines and parts of the graphics is 0,2 mm. If there are lines and negative space between lines and parts of the graphics thinner than 0,2 mm, NICKNACK does not guarantee they will be printed. Customer agrees that they reviewed the Pantone colors and they agree to them. Customer agrees that if there is not a white underprint, chosen Pantone colors may slightly vary in shade. Outlines, lines, text or lettering printed on rotary screen print machines without the use of a backing colour with thickness under 1mm may result in reduced resistance to mechanical and chemical damage. Fro this reason, we recommend creating graphic documents with this minimum specified thickness for rotary screen printing. NICKNACK does not guarantee the resistance to mechanical and chemical damage of graphics if lines, outlines or lettering are narrower than 1mm.

I ☐ **agree** with this preview

☐ disagree (mark changes into the picture)

I agree with the terms and conditions of the NICKNACK s.r.o. company.

date:

signature:

PRINT PREVIEW NICKNACK

date:

logo size: 40×30 mm

colour specification:

printable area: 40×30 mm
(place your logo here, in real size 1:1)



0,04 l

1:1

Minimal thickness of lines and negative space between lines and parts of the graphics is 0,2 mm. If there are lines and negative space between lines and parts of the graphics thinner than 0,2 mm, NICKNACK does not guarantee they will be printed. Customer agrees that they reviewed the Pantone colors and they agree to them. Customer agrees that if there is not a white underprint, chosen Pantone colors may slightly vary in shade. Outlines, lines, text or lettering printed on rotary screen print machines without the use of a backing colour with thickness under 1mm may result in reduced resistance to mechanical and chemical damage. Fro this reason, we recommend creating graphic documents with this minimum specified thickness for rotary screen printing. NICKNACK does not guarantee the resistance to mechanical and chemical damage of graphics if lines, outlines or lettering are narrower than 1mm.

I ☐ **agree** with this preview

☐ disagree (mark changes into the picture)

I agree with the terms and conditions of the NICKNACK s.r.o. company.

date:

signature: